

# Model: 75T


## THE VARIABLE BRICK HOUSE

This pot is good for short run soldering and desoldering of through-hole printed circuit boards, as well as a variety of other applications.

It takes approximately 8 bars of our CS-PBF4 to fill our Variable Brick House Solder pot.

### TECHNICAL SPECIFICATIONS

RoHS Compliant	Yes
Wattage	650 watts
Maximum Temperature	650 °F / 343°C
Solder Bath Depth	1.75 in / 4.45 cm
Solder Bath Diameter	4-3/4" x 4-3/4" in
Country of Origin	US
Net Volume	Approx. 18.5 oz

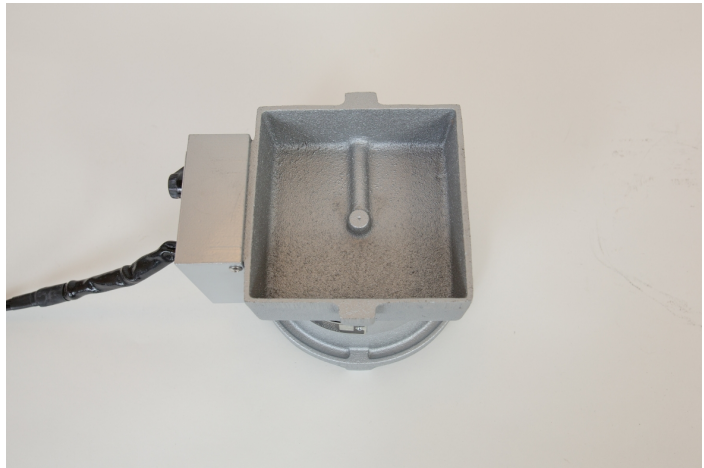

### FEATURES AND BENEFITS

### REPLACEMENT PARTS

The following products can be used as replacements for Model 75T featured on this page:

Model	Product Name
PC12T75T	Replacement Solder Pot Cordset
PE37-70-75	Replacement Solder Pot Element
PT1280	Replacement Thermostat