


# Model: CS-PBF2

## SOLDER SPOOL

Lead free no-clean wire solder that has been developed with a unique no clean flux system specifically for high temperature lead free alloys. Utilizing synthetically refined resin and a very effective activator, the solder wets and spreads beautifully. CS-PBF2 exhibits virtually no spattering and conforms to J-STD-004, RELO.

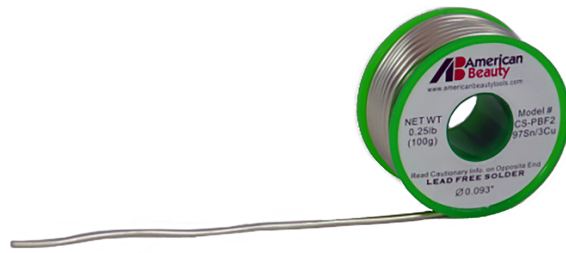

### TECHNICAL SPECIFICATIONS

Melting Range	441 F - 590 F
Net Volume	1/4 Pound
Product Diameter	.093"
Harmonization Code:	8003.00.0000
RoHS Compliant	Yes
Safety Data Sheets	<a href="#">Download</a>
Warranty Policy	<a href="#">Details</a>

### FEATURES AND BENEFITS

Lead-Free, RoHS Compliant, solder wire containing 97%Tin/3% Copper.

Melting range of 441F - 590F

No-Clean formula.

Exhibits virtually no spattering.